

# Product data sheet

Specifications

**SQUARE D**



Contactor, Definite Purpose, 60A, 3 pole, 30 HP at 575 VAC, 3 phase, 208/240 VAC 60 Hz 220 VAC 50 Hz coil, open

8910DPA63V09

Product availability : Stock - Normally stocked in distribution facility

**Price\* : 248.50 USD**

## Main

Product or Component Type	Definite Purpose Contactor
Line Rated Current	60 A
Number of Poles	3P
Pole contact composition	3 NO
Range of Product	DPA

## Complementary

Maximum Horse Power Rating	5 hp 115 V AC, 1 phase 10 hp 230 V AC, 1 phase 30 hp 460 V AC, 3 phase 30 hp 575 V AC, 3 phase 25 hp 230 V AC, 3 phase
Locked rotor rated current	360 A 277 V AC 300 A 460 V AC 240 A 575 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	208...240 V AC 60 Hz 220 V AC 50 Hz
Phase	3 phase
Electrical Connection	Box lugs Quick connect terminals

## Environment

Product Certifications	UL Recognized CSA
------------------------	----------------------

## Ordering and shipping details

Category	21346-8910 DPA 6_(60 AMP)
Discount Schedule	CP1B
GTIN	785901080794
Returnability	Yes
Country of origin	CN

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.80 in (9.652 cm)
Package 1 Width	4.50 in (11.43 cm)
Package 1 Length	2.80 in (7.112 cm)
Package 1 Weight	24.00 oz (680.389 g)


## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.

## Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

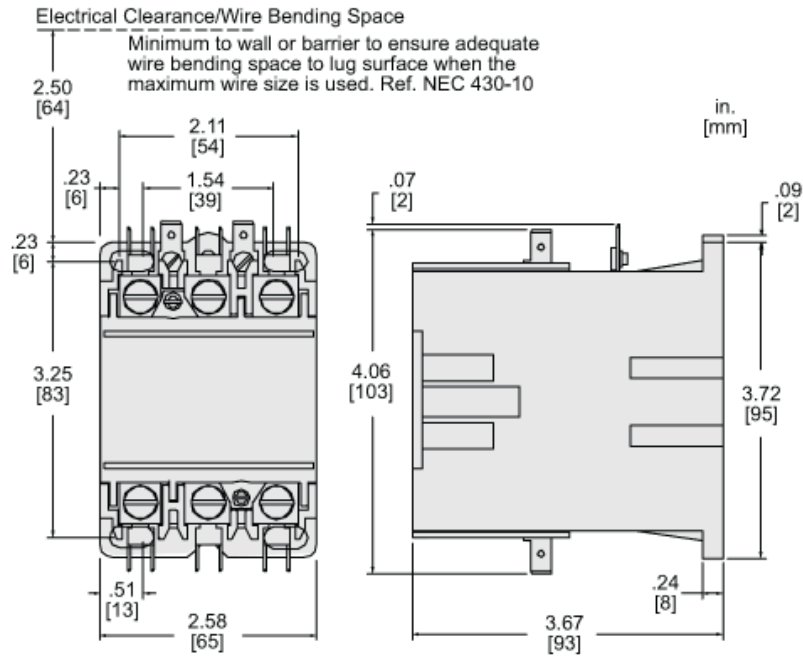

Recommended replacement(s)