

Ficha técnica del producto

Especificaciones



CENTRO DE CARGA QO, GABINETE P/ I. TERMOMAG, 100 A, 1F, 3H, 2SP NEMA 3R

QO2100BNRB

Principal

Marketing Trade Name	QOD
Product Type	Enclosed circuit breaker
Enclosure Type	Envolvente resistente a las inclemencias del tiempo

Opcionales

Tightening Torque	35 lb.in AWG 14...AWG 10 cobre 35 lb.in AWG 12...AWG10 aluminio 40 lb.in AWG 8...AWG 4 aluminio/cobre 50 lb.in AWG 3...AWG 2 aluminio/cobre Mandril 50 lb.in AWG 3...AWG 1 aluminio/cobre
Rated Current	100 A
Number of Spaces	2
Max Short Circuit Current Rating	22 kA
Maximum Number of Single Pole Circuits	2
Maximum Number of Tandem Breakers	0
Number of Phases	1 fase
Wire Size	AWG 14...AWG 1 cobre
Ground Bar	Grounding bar (ordered separately)
Electrical Connection	Lugs (**)
Wiring Configuration	3-hilos
Busbar Material	Tin plated copper (***) embarrado eléctrico
Enclosure Material	Welded galvanized steel
Surface Finish	Baked enamel gris
Box Number	10R
Breaker Compatibility	Interruptor automático QO 2P
Height	335 mm
Width	176 mm
Depth	104.65 mm

Ambiente

Enclosure Rating	NEMA 3R exterior
Product Certifications	Registrado por UL

Unidades embalaje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	12.7 cm
Package 1 Width	36.83 cm
Package 1 Length	20.066 cm
Package 1 Weight	3.651 kg
Unit Type of Package 2	PAL
Number of Units in Package 2	105
Package 2 Height	104.14 cm
Package 2 Width	101.6 cm
Package 2 Length	121.92 cm
Package 2 Weight	411.408 kg

Oferta sostenibilidad


Estado de oferta sostenible	Producto Green Premium
Reglamento REACH	Declaración de REACH
Conforme con REACH sin SVHC	Sí
Directiva RoHS UE	Conforme Declaración RoHS UE
Sin metales pesados tóxicos	Sí
Sin mercurio	Sí
Información sobre exenciones de RoHS	Sí
Normativa de RoHS China	Declaración RoHS China Declaración proactiva de RoHS China (fuera del alcance legal de RoHS China)
Comunicación ambiental	Perfil ambiental del producto

Ficha técnica del producto

QO2100BNRB

Ilustración técnica

Dimensiones

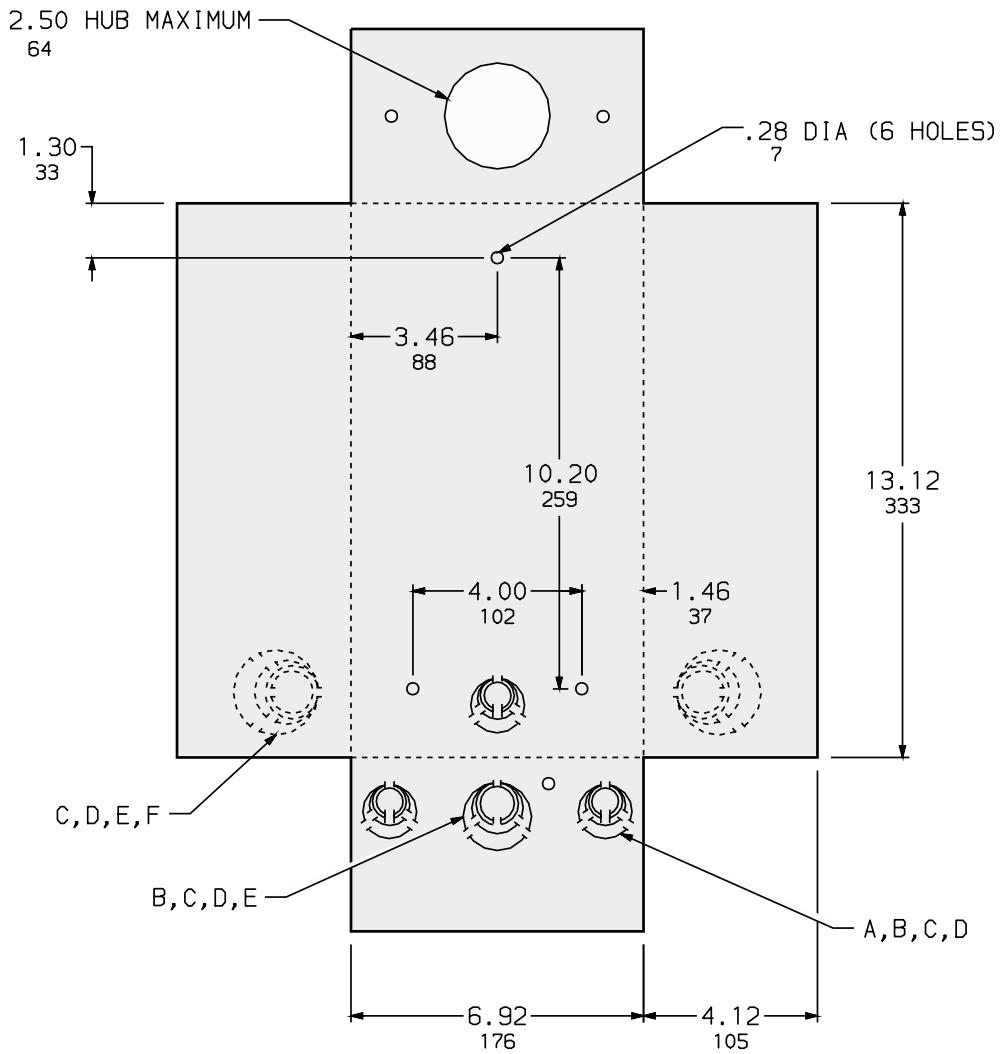


KNOCKOUTS						
SYMBOL	A	B	C	D	E	F
IN	.50	.75	1.00	1.25	1.50	2.00
MM	13	19	25	32	38	51

in.
mm

All dimensions are approximate. Also see technical documentation.

Diagrama de cableado

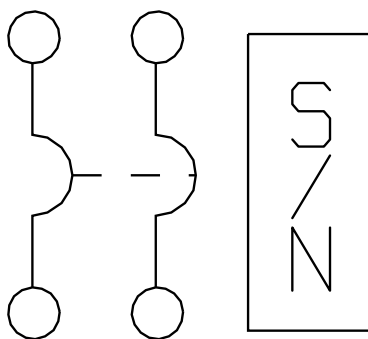

120/240VAC

QO2100BNF
QO2100BNS
QO2100BNRB

Reemplazo(s) recomendado(s)