





Mini circuit breaker, QOU, 70A, 2 pole, 120/240 VAC, 10kA

QOU270

Product availability: Stock - Normally stocked in distribution facility

Price*: 184.68 USD

Main

Product or Component Type	Miniature circuit-breaker
Range of Product	QOU
Circuit breaker type	Standard
Circuit breaker application	HACR and Switching Duty rated

Complementary

= = :::(= : : : : : : : : : : : : : : :	
Line Rated Current	70 A
Electrical connection	Slotted box lugs, line side Slotted box lugs, load side
[Ue] rated operational voltage	120/240 V AC 120 V AC 48 V DC
Mounting Mode	Unit mount
AWG gauge	AWG 12AWG 2/0 aluminium/copper
Height	4.45 in (113.03 mm)
Width	1.5 in (38.10 mm)
Depth	2.95 in (74.93 mm)
Tightening torque	45 lbf.in (5.08 N.m) (AWG 14AWG 2)

Environment

Product Certifications UL Listed CSA IEC	
---	--

Ordering and shipping details

00900-QOU BREAKERS & SWITCH		
DE2		
785901418832		
1		
12.48 oz (353.802 g)		
Yes		
MX		

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.10 in (5.334 cm)
Package 1 width	3.50 in (8.89 cm)
Package 1 Length	4.80 in (12.192 cm)

Offer Sustainability


Sustainable offer status	Green Premium product		
REACh Regulation	REACh Declaration		
REACh free of SVHC	Yes		
EU RoHS Directive	Compliant EU RoHS Declaration		
Toxic heavy metal free	Yes		
Mercury free	Yes		
RoHS exemption information	Yes		
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.		
Halogen content performance	Halogen free product		

Contractual warranty

Warranty	18 months		
----------	-----------	--	--

Technical Illustration

Dimensions

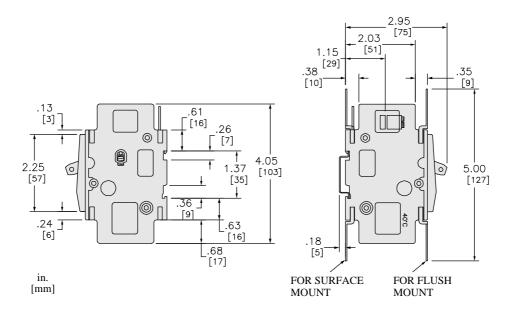

2.50 [64] MIN. WIRE BENDING
SPACE FOR 2 AWG
1.50 [38] MIN. WIRE BENDING
SPACE FOR 14 AWG
TYP. BOTH ENDS FOR ALL CB'S SHOWN
PER ARTICLE 430-1-(B) NEC

